


# 2-Person Outdoor Patio Porch Swing Owner's Manual

**MODEL:**  
PPS23001  
PPS23003



# EAST OAK

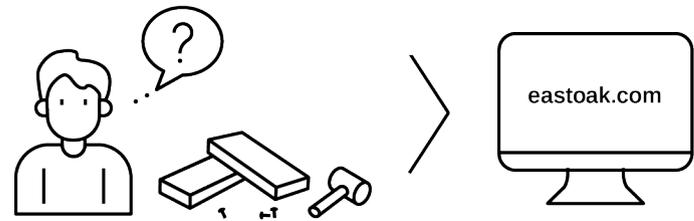

**Questions? Comments?  
Reach out to us for expert support!**

✉ [support@eastoak.com](mailto:support@eastoak.com)

🌐 [eastoak.com](http://eastoak.com)

☎ 1-833-EAST-OAK (USA)

(1-833-327-8625) Mon-Fri 8am-8pm EST

Follow [eastoakliving](#) on



**Claim your 3-year warranty**

at [eastoak.com/warranty](http://eastoak.com/warranty)

**Please scan the QR code  
to view the installation video**




## IMPORTANT CAUTION

**Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents. If any part is missing or damaged, do not attempt to assemble the product. If any part is missing or damaged, please contact customer service at [support@eastoak.com](mailto:support@eastoak.com).**

- To obtain the longest lifespan of the swing, minimizing exposure to direct sunlight is recommended.
- When using the swing in summer heat, be careful of the high temperature of the iron on the surface of the swing.
- Do not use harsh cleaners and disinfectants to clean textilene.
- Please clean the swing occasionally after use or being exposed to rain.
- Some parts may contain sharp edges. Wear protective gloves if necessary during assembly.
- When using power tools, please adjust the gear to the minimum. Otherwise, it will cause damage to the parts.
- Do not shake the swing violently, use it properly.
- Children must be supervised by adults to ensure the safety when using.
- Please remove the roof on strong wind days to avoid blowing over.

## SAFETY GUIDE

- For your safety and to reduce the risk of severe personal injury, the user must read and understand this Safety Guide.
- Assemble each piece only following the instructions. Using tools or hardware not included in the original packaging, or improperly assembly may cause the product to malfunction or has a risk of severe personal injury.
- Assemble on a flat and soft surface, such as carpeting, to avoid scratches or damage.



### NOTICE

- Tighten all bolts and screws again within the first two weeks of assembly.
- Check the tightness of all bolts every two months, tighten them if necessary.

## CARE & CLEANING

- To obtain the longest lifespan of the swing, clean the frame and Textilene fabric with a damp towel, and then dry the swing thoroughly. This will remove dirt particles and prevent mildew.
- Do not clean the swing with abrasive materials, bleach, or solvents.
- Store the swing in a dry, sheltered place when not in use.
- Keep the swing away from the fire, extreme heat, freezing conditions, and inclement weather such as rain, hail, snow, or wind.
- PLEASE NOTE that the metal paint may come off due to weather conditions.
- It is recommended to wipe the seat with a damp cloth after use or rain to prevent stains and waterlogging.
- Attention: Children must be supervised by adults when playing.



### READ & SAVE BELOW INSTRUCTIONS BEFORE ASSEMBLY


1. Please separate and identify all parts, making sure that you have all of the parts listed.
2. Assemble on a soft surface, such as carpeting, to avoid scratching the finish.
3. Please assemble step by step and follow the instructions.
4. Washers must be used.
5. Do not completely fasten each screw and nut until all the screws are properly fixed.

## ASSEMBLY SUGGESTIONS

- Two adults required for a safe assembly



## PARTS LIST



Crossbars  
**A** X 1 PC



Anterior Leg Canal  
**B** X 2 PCS



Rear Leg Tube  
**C** X 2 PCS




Connecting Tube  
**D** X 2 PCS



Reinforced Pole  
**E** X 2 PCS



Seat  
**F** X 2 PCS



Seat Frame  
**G** X 4 PCS



Ceiling Support Rod  
**H** X 1 PC



Support Feet  
**I** X 4 PCS



Canopy  
**J** X 1 PC



Spring Steel  
**K** X 4 PCS



Knob  
**L** X 2 PCS

## PARTS LIST



Hex Wrench  
**T** X 1 PC



Spanner  
**U** X 1 PC



M8\*35 Screw  
**N** X 4 PCS



M6\*20 Screw  
**M** X 12 PCS + Spare X 1



Plastic Washer  
**S** X 8 PCS + Spare X 1




M8\*60 Screw  
**P** X 8 PCS + Spare X 1



M6\*58 Screw  
**O** X 4 PCS





M6\*62 Screw  
**Q** X 8 PCS + Spare X 1




M8\*64 Screw  
**R** X 4 PCS

# 1 Install the support feet

Align their screw holes, install screws with a spanner, pre-install the two screws on each foot before tightening them fully, and then put on the plastic cap. Install the four support feet in the same way.


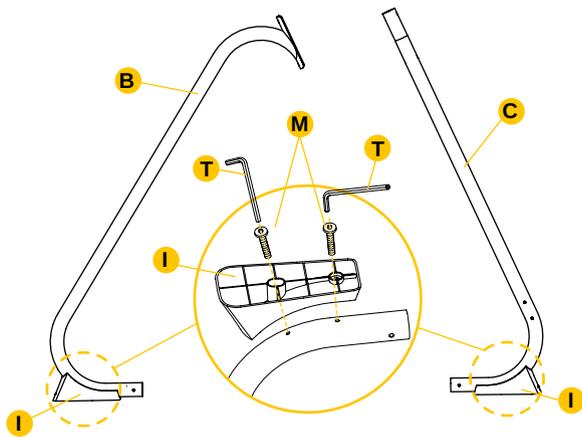



**TIPS:** Since the support feet are deep and the screws are short, use a hex wrench (T) to secure the screw heads before tightening the screws.

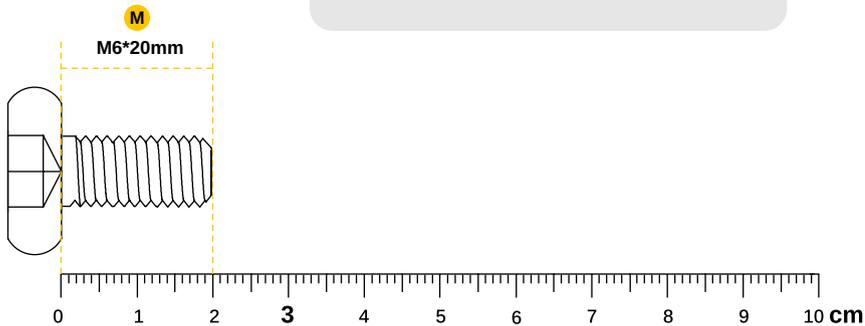




# 2 Install the outer frames

Connect the pipes B and D, align their screw holes, and install screws with a spanner, and then connect the pipes C and D in the same way. Pre-install the two screws before tightening them fully, and then put on the plastic cap. Install the other outer frame in the same way.

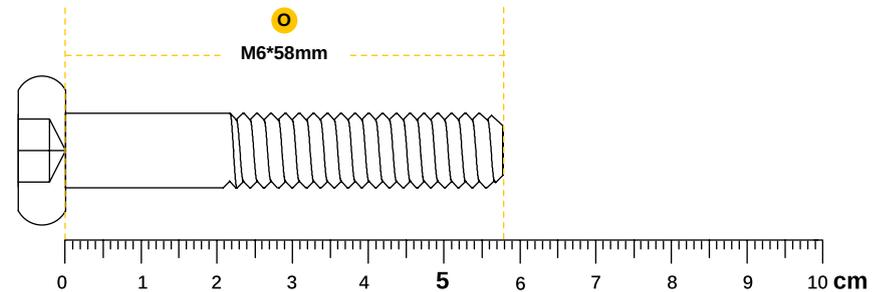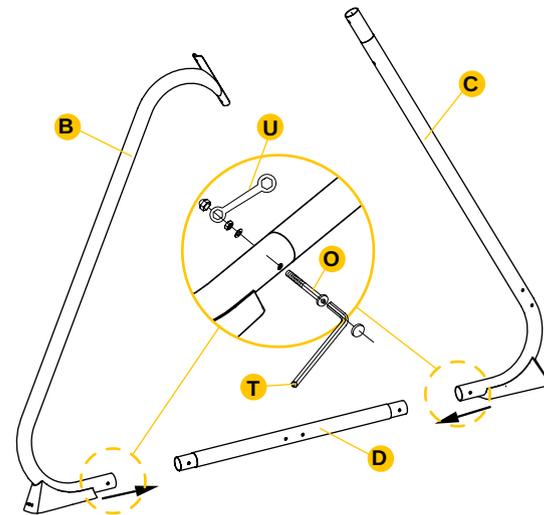

### 3 Install the crossbars

Connect the bar A with the two installed outer frames, align their screw holes, install screws with a spanner, pre-install the screws on two sides before tightening them fully, and then put on the plastic caps.

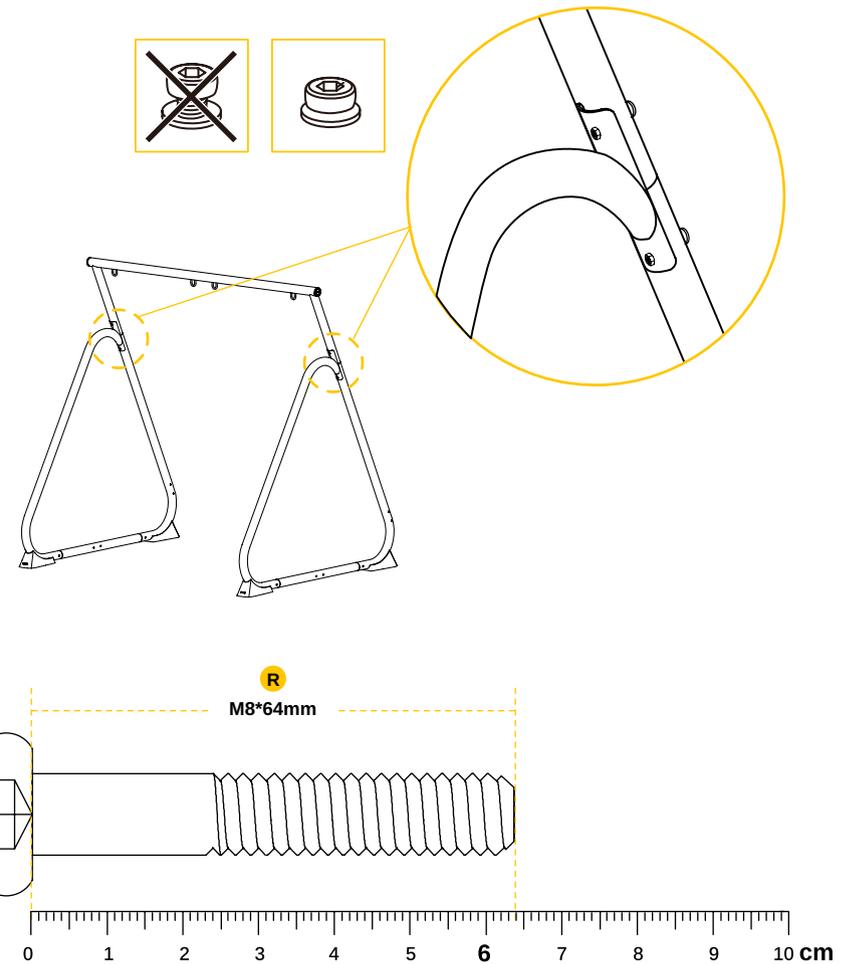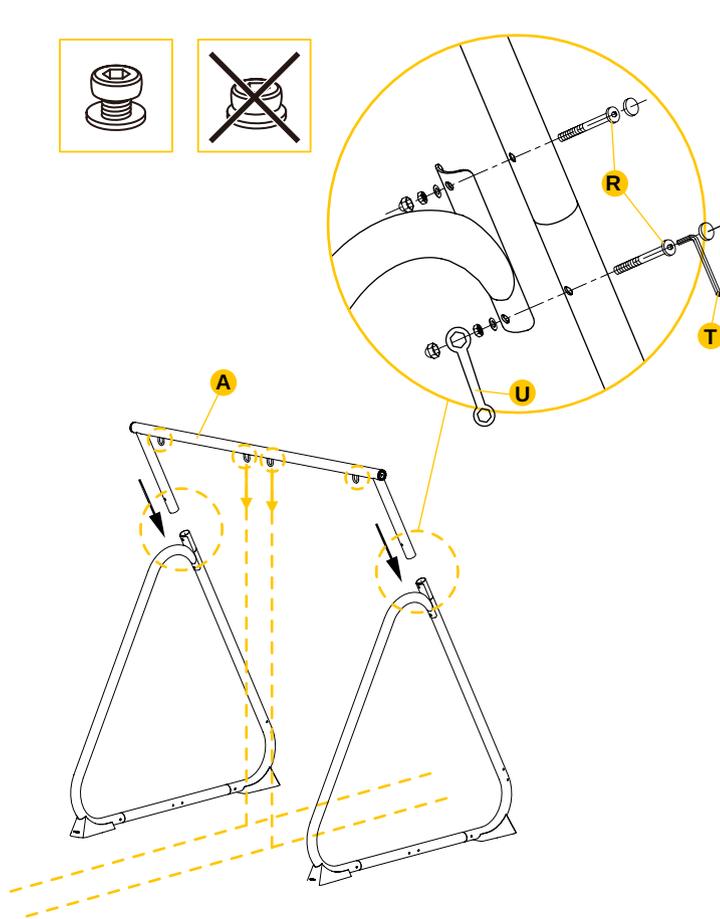

# 4 Install the connecting rods






Connect the rod E with the installed outer frames, align their screw holes, install screws with a spanner, pre-install the four screws on the two iron frames before tightening them fully, and then put on the plastic caps.



**E** X 2PCS






**Q** X 8PCS

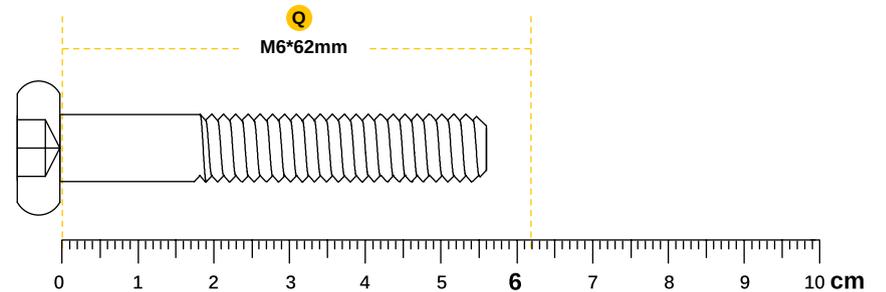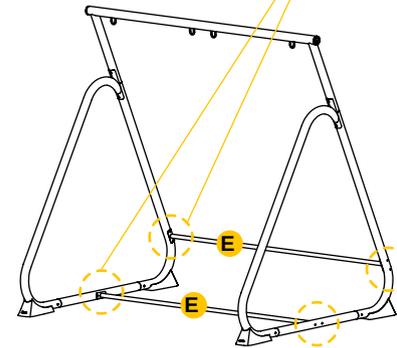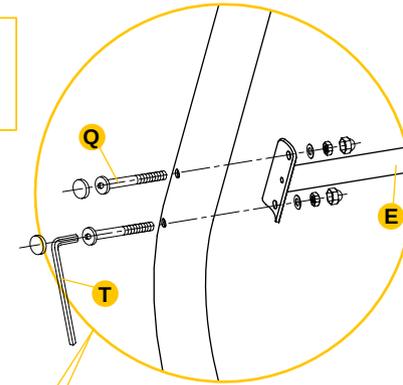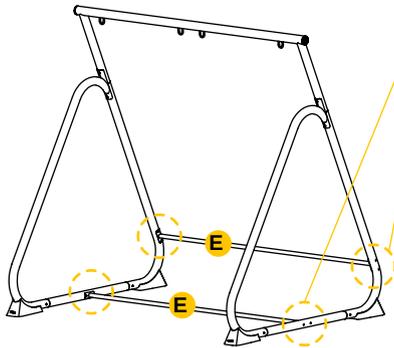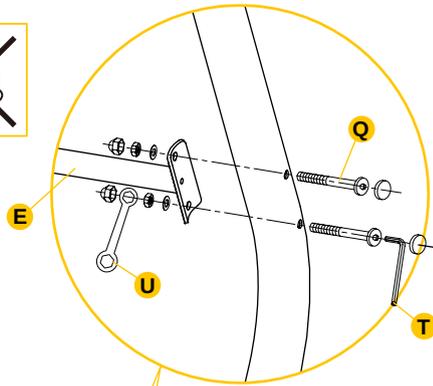


# 5 Install the seat

Connect the handrail G with the main body F of the seat (plastic washer S shall be used between them), align their screw holes, install screws with a spanner, pre-install the screws on two sides before tightening them fully.

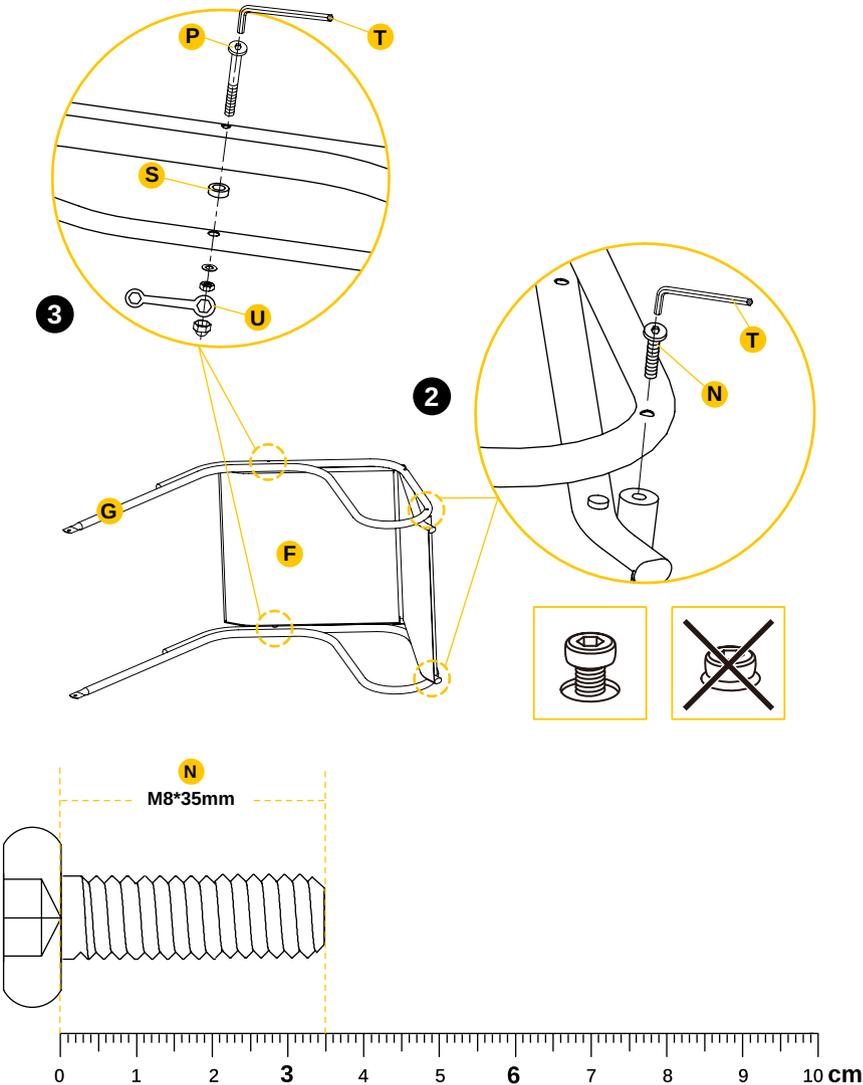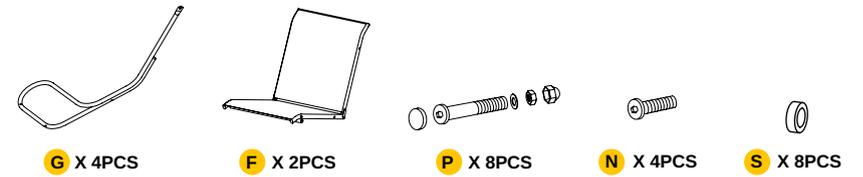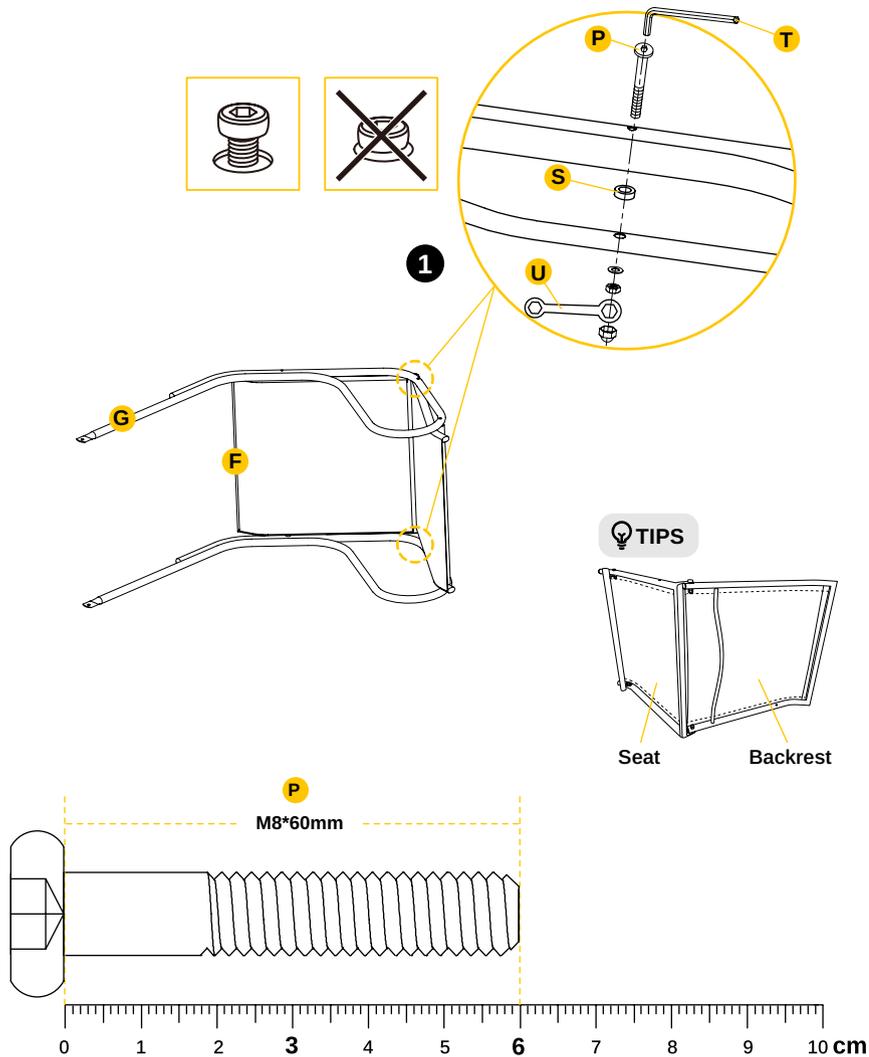

## 6 Tighten the screws

Install the screws with a wrench, fully tighten the pre installed screws on both sides, and then wear a plastic cap.

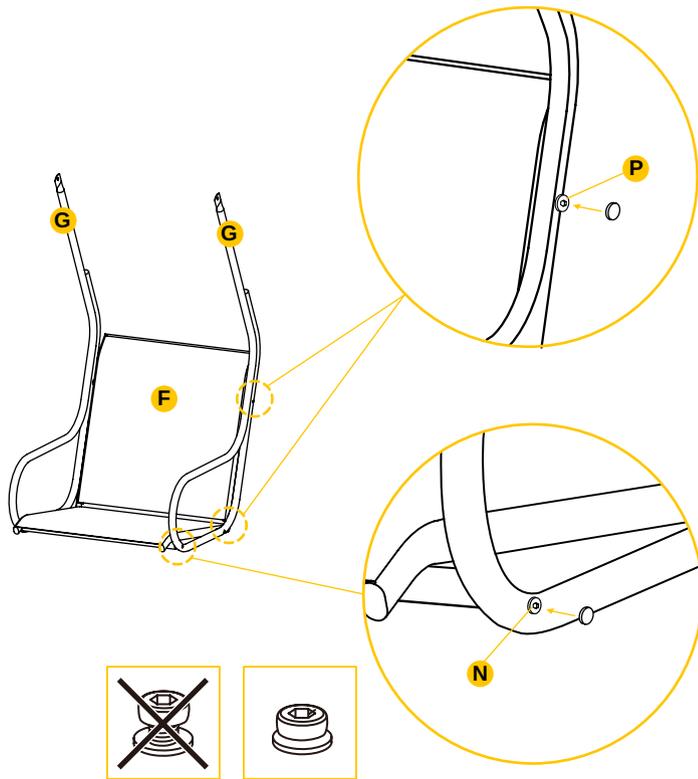


## 7 Connect the main frame of the swing and the seat




**K** X 4PCS

Connect the installed seat with the main frame of the swing by spring steel K.



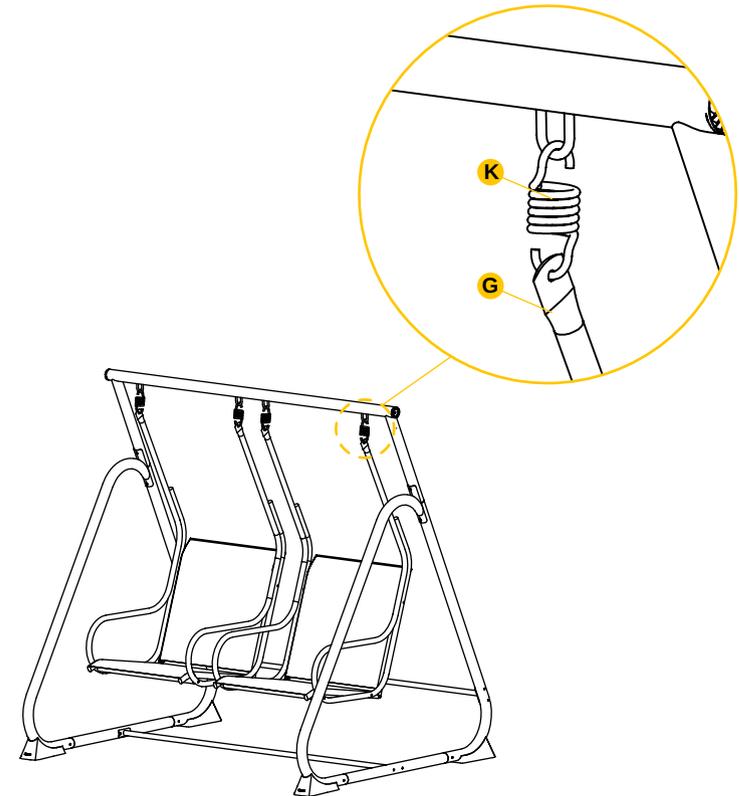


# 8 Install the support rod of the canopy

Align the screw holes, install screws with a spanner, pre-install the four screws on two sides before tightening them fully, and then put on the plastic caps.

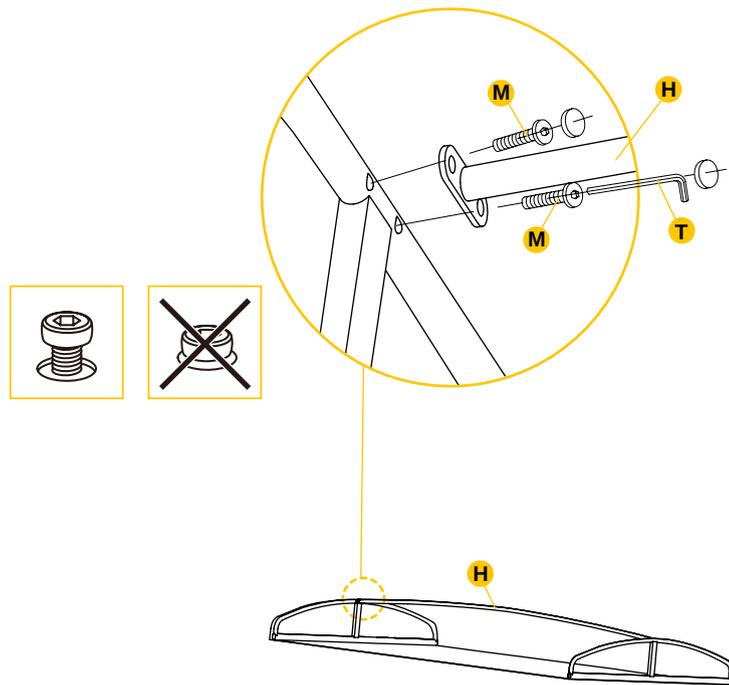

**TIPS:** To make installation easier, first bend the top support rod a little. Then install one side to align the screws first, and then install the other side.

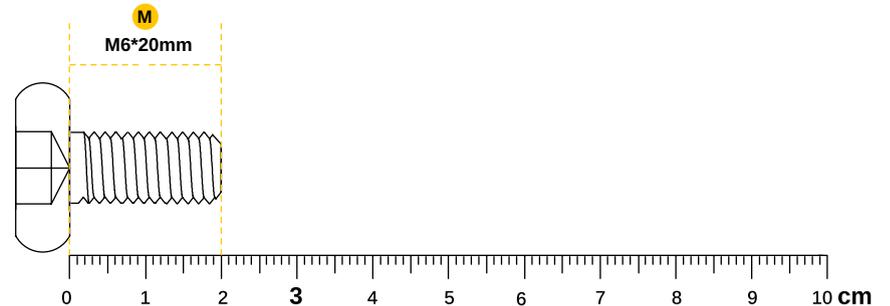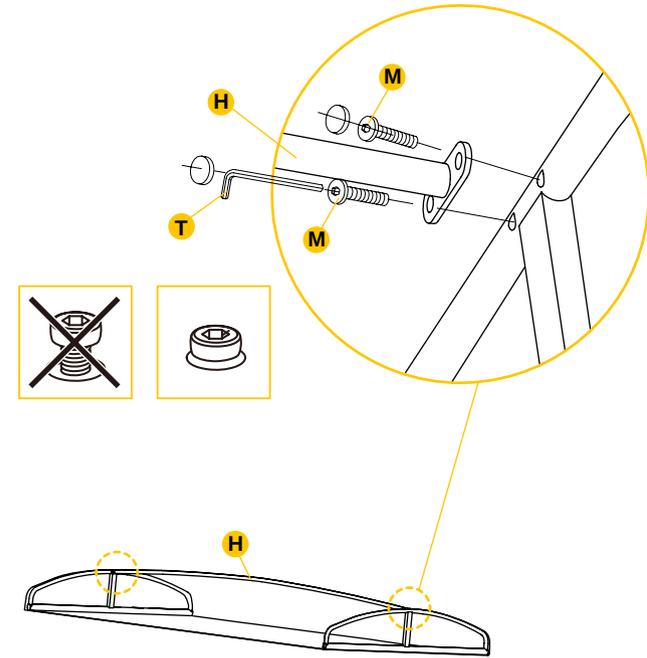

# 9 Install the canopy

Align the gears of the canopy and the swing, turn the knob L clockwise to screw and anticlockwise to unscrew, to adjust the canopy's angle.





J X 1PC





L X 2PCS

1

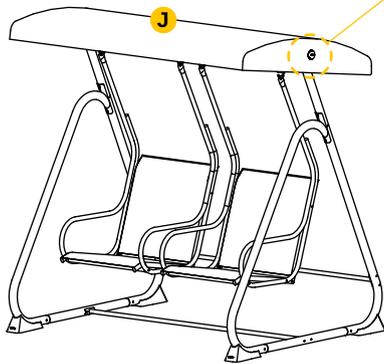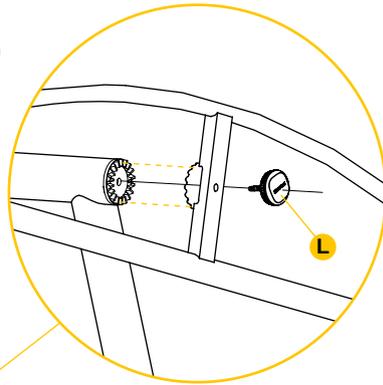

2

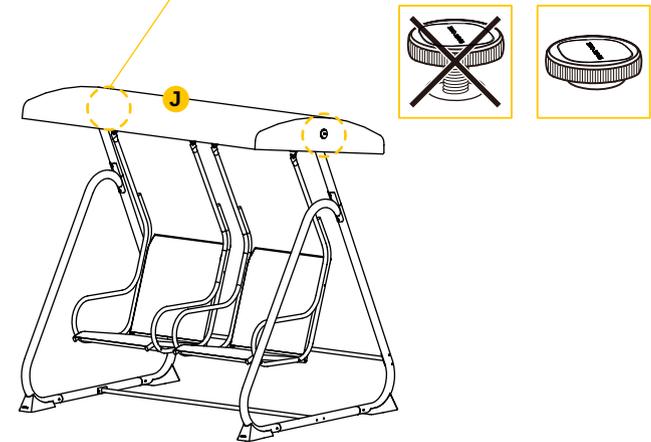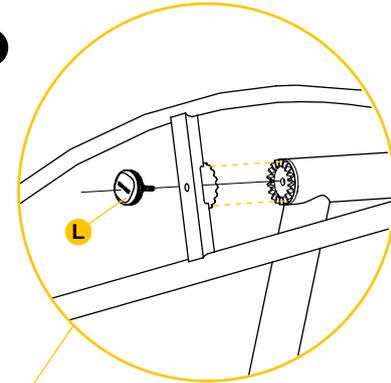

**TIPS:** When installing the canopy, the gears need to be aligned. Install one side of the canopy first, then install the other side of the canopy.

---

## FEATURES

- More solid, stronger texture
- Large size, ergonomic and comfortable
- Steel frame and iron frame processed by electrophoresis process, with strong anti-rust ability
- Double-layer Textilene quick-drying cotton offers excellent weather resistance, and is easy to dry and clean
- Easy to assemble

---

## WHAT'S IN THE BOX

- 1 x Crossbars
- 4 x Leg Tube
- 2 x Connecting Tube
- 2 x Reinforced Pole
- 2 x Seat
- 4 x Seat Frame
- 1 x Ceiling support rod
- 4 x Support Feet
- 1 x Canopy
- 1 x Accessory Kit
- 1 x Owner's Manual

---

## WARRANTY POLICY

### GUARANTEED 3-YEAR WARRANTY

Thank you for choosing East Oak. This product is covered by our company warranty for up to 3 years from its original purchase date.

### CLAIM WARRANTY

If you'd like to claim your product's warranty, register your new product on our website at [www.eastoak.com/warranty](http://www.eastoak.com/warranty).

# EAST OAK

✉ [support@eastoak.com](mailto:support@eastoak.com)

🌐 [eastoak.com](http://eastoak.com)

☎ 1-833-EAST-OAK (USA)